

## Gysmi TIG 130 HF

### TIG DC 130 A

MMA Ø Electrodes 1.6 ▶ 3.2 mm

Réf. 015609

#### SMI Inverter Technology welder

Ideal for professionals of pipe-works and industrial maintenance.

#### TIG functions :

- 2 start possibilities :
  - ▶ HF no touch
  - ▶ Lift (TSL) with touch – GYS process
- Down slope and post-gaz adjustable.
- Up slope and pre-gaz fixed.

The other assets of the GYSMI TIG 130 HF :

- very light weight (4,7 kg) and a reduced volume
- low current consumption on domestic mains 230 V
- protection against power generators' variations (+/- 15%)
- ARC FORCE
- HOT START
- ANTI STICKING

➤ main supply lead : 1m80

➤ Accessories in OPTION : Réf. 015616


- TIG torch 140 A, 4m with trigger
- Pipe and pressure flowmeters
- Electrode holder with cables 16 mm<sup>2</sup> (2m) and Dinse connector diameter 25
- Earth clamp with cables 16 mm<sup>2</sup> (1,6 m) and Dinse connector diameter 25



MADE in FRANCE



Réf. 015616

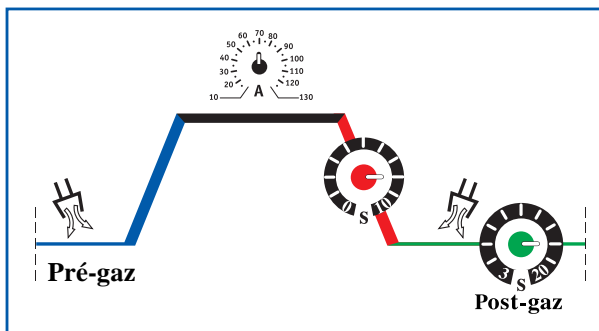

CE NORMES EUROPÉENNES - EUROPEAN STANDARDS  
EUROPÄISCHE NORM - NORMAS EUROPEAS  
EUROPESE NORM

EN 60 974-1

Power generator protection (+/- 15%)

50/60 HZ V		TIG For normal use		MMA Ø mm		U <sub>0</sub> V		IP		CE NORM		cm		kg		kg	
230 1ph	16	10 > 130 A	45% @ 130 A	1,6 > 3,2	10/25	70	21	60974/1	13 x 31 x 21	4,1	8,6						

EN 60 974-1

MADE in FRANCE